KZS-2M A B10/0.03



Specificatii

Cod ETI	002173202
Descriere	KZS-2M A B10/0.03
Denumire clasă	Disjunctor cu protec ie diferen ială (RCBO)
Curent nominal (A)	10A
Tip	A
Curent de defect nominal (A)	0.03A
Caracteristică de întrerupere	B
Număr de poli	1+N
Capacitatea de rupere (kA)	10kA
Frecven ă nominală (Hz)	50Hz/60Hz
Sec iune transversală nominală	1mm²-25mm²
Standarde	IEC/EN 61009

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	230V
Rated insulation voltage Ui	500V
Rated current	10A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	Da
Width in number of modular spacings	2
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1…25mm²
Connectable conductor cross section multi-wired	1…25mm²

Desen cotat

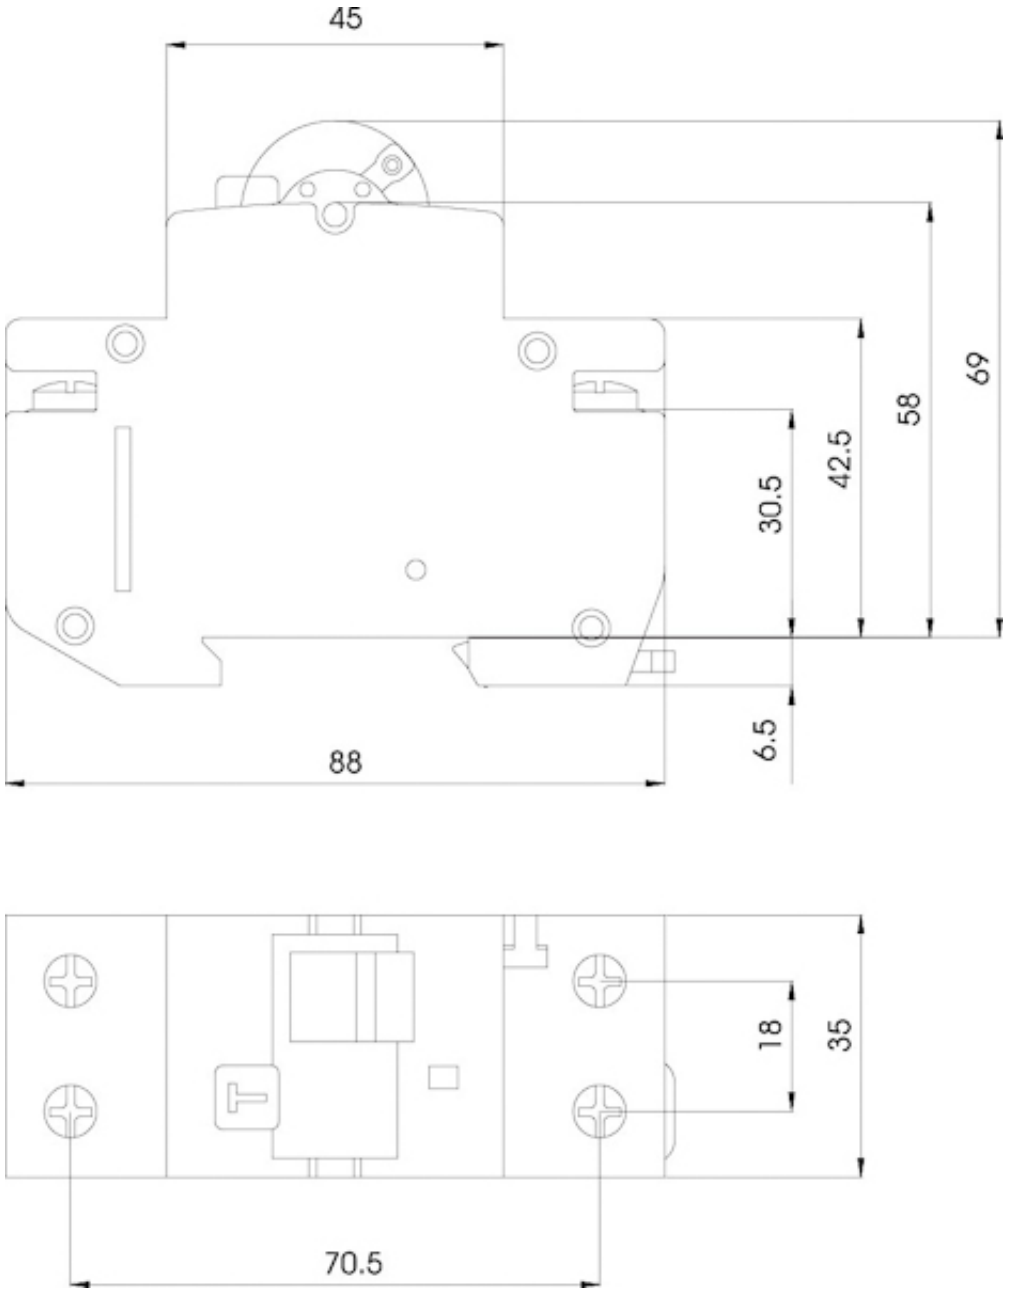

Simbol/Conexiune

