
KZS-1M-UNI 1p+N A B20/0.01

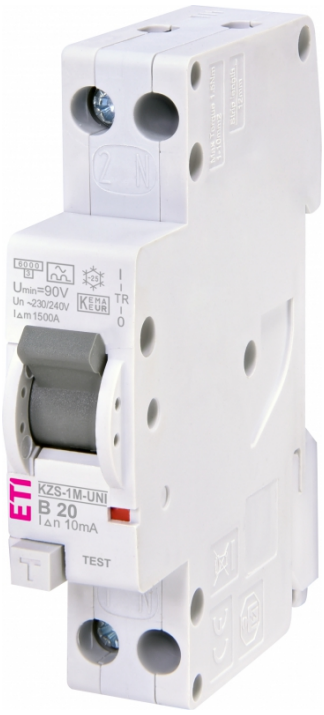

Specificatii

Cod ETI	002176005
Descriere	KZS-1M-UNI 1p+N A B20/0.01
Denumire clasă	Diferen ial RCBO
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	20
Tip	A
Curent de defect nominal (A)	0.01
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	1+N
Frecven ă nominală (Hz)	50/60
Standarde	EN/IEC 61009-1
Sec iune transversală nominală	1...10

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
Eplan mușchi


ETIM clasificare internationala

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	240V
Rated insulation voltage Ui	250V
Rated impulse withstand voltage Uimp	4kV
Rated current	20A
Rated fault current	0,01A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6kA
Rated short-circuit breaking capacity according to IEC 60947-2	6kA
Rated short-circuit breaking capacity Icn according to EN 61009-1	6kA
Disconnection characteristic	Undelayed
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	1
With interlocking device	
Over voltage category	3
Pollution degree	2
Ambient temperature during operating	-35…40°C
Width in number of modular spacings	1
Built-in depth	70mm
Anti-nuisance tripping version	
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1…10mm²
Connectable conductor cross section multi-wired	1…10mm²

Caracteristici

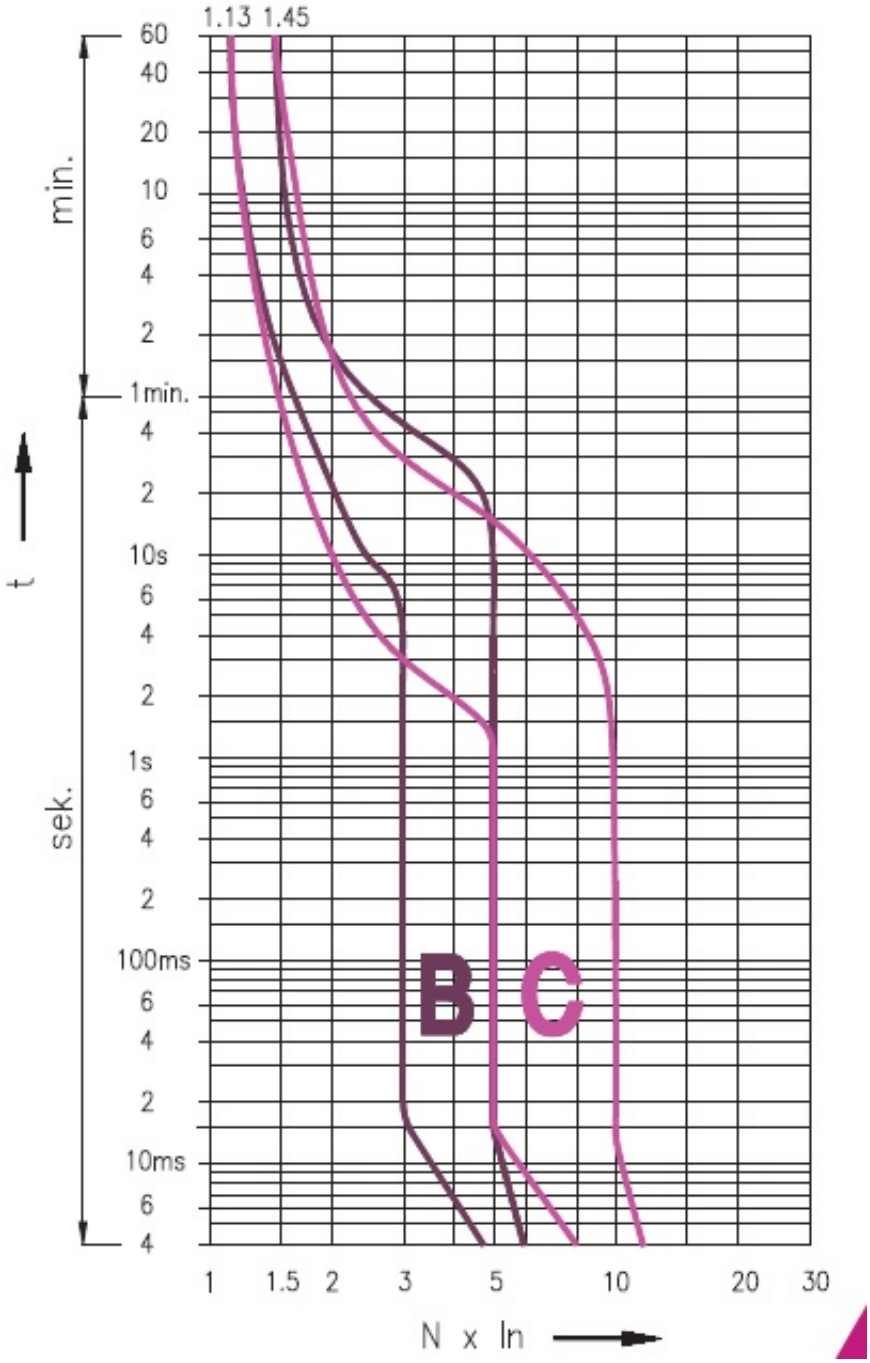

Desen cotat

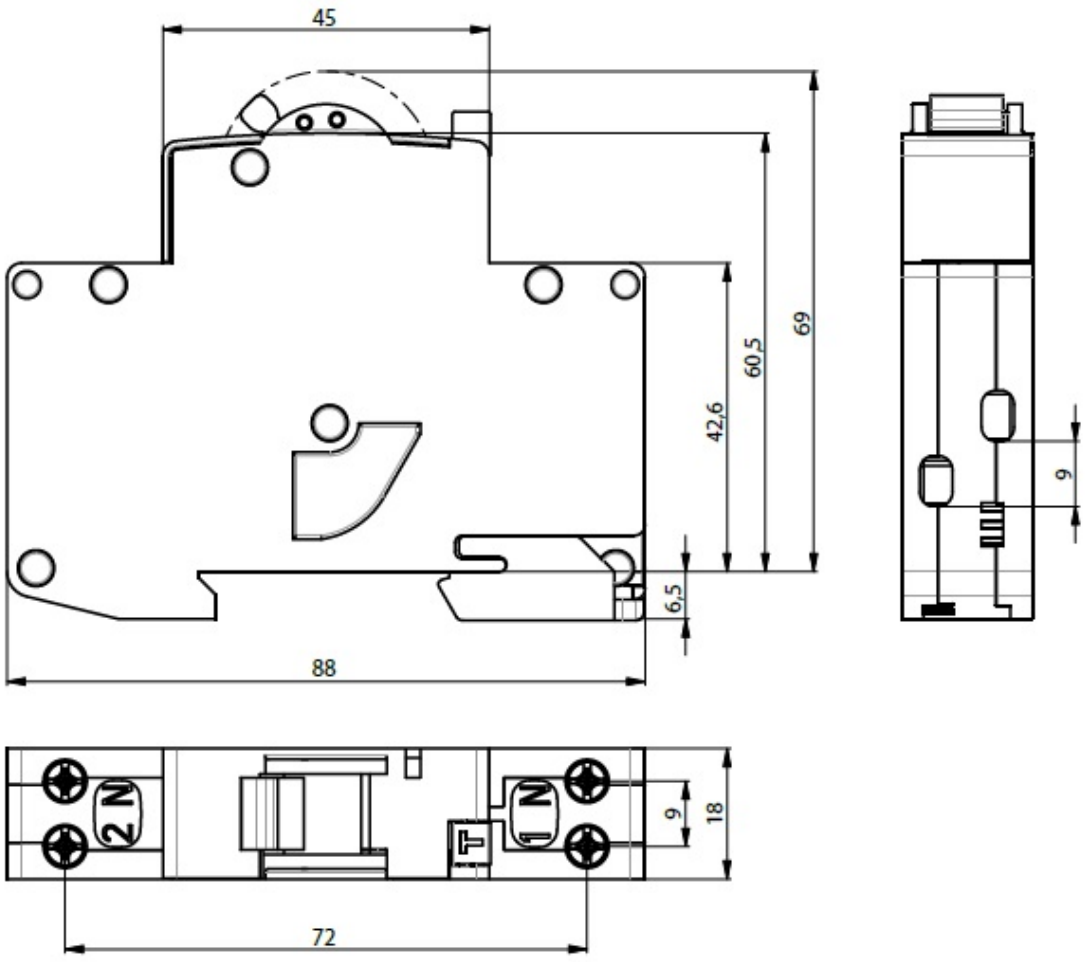

Simbol/Conexiune

