
EFI-P2 A 25/0.03

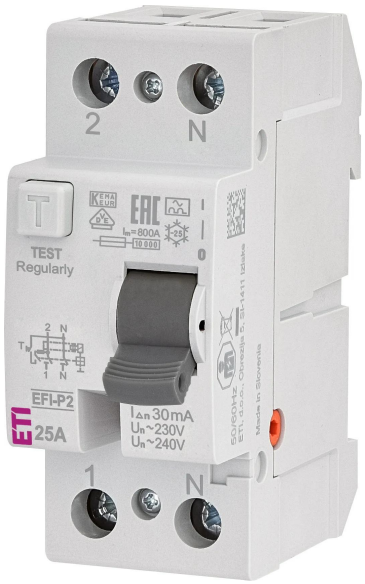

Specificatii

Cod ETI	002061111
Descriere	EFI-P2 A 25/0.03
Denumire clasă	Întrerupător diferen ial
Curent de defect nominal (A)	0.03A
Tip	A
Curent nominal (A)	25A
Adâncime (mm)	68mm
Tip montaj	TH 35
Număr de poli	1+N
Curent nominal de scurtcircuit Inc (kA)	10kA
Timp de declansare	Undelayed
Tensiune nominală AC (V)	230V/240V
Frecven ă nominală (Hz)	50Hz/60Hz
Sec iune transversală nominală	1mm²-25mm²
Standarde	IEC/EN 61008
Grad de protec ie IP	IP20

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Certificate
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
White paper
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	2
Rated voltage	240V
Rated current	25A
Rated fault current	30mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	Nu
Short-time delayed tripping	Nu
Short-circuit breaking capacity (Icw)	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	Da
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Built-in depth	68mm
Connectable conductor cross section multi-wired	1…25mm²

Desen cotat

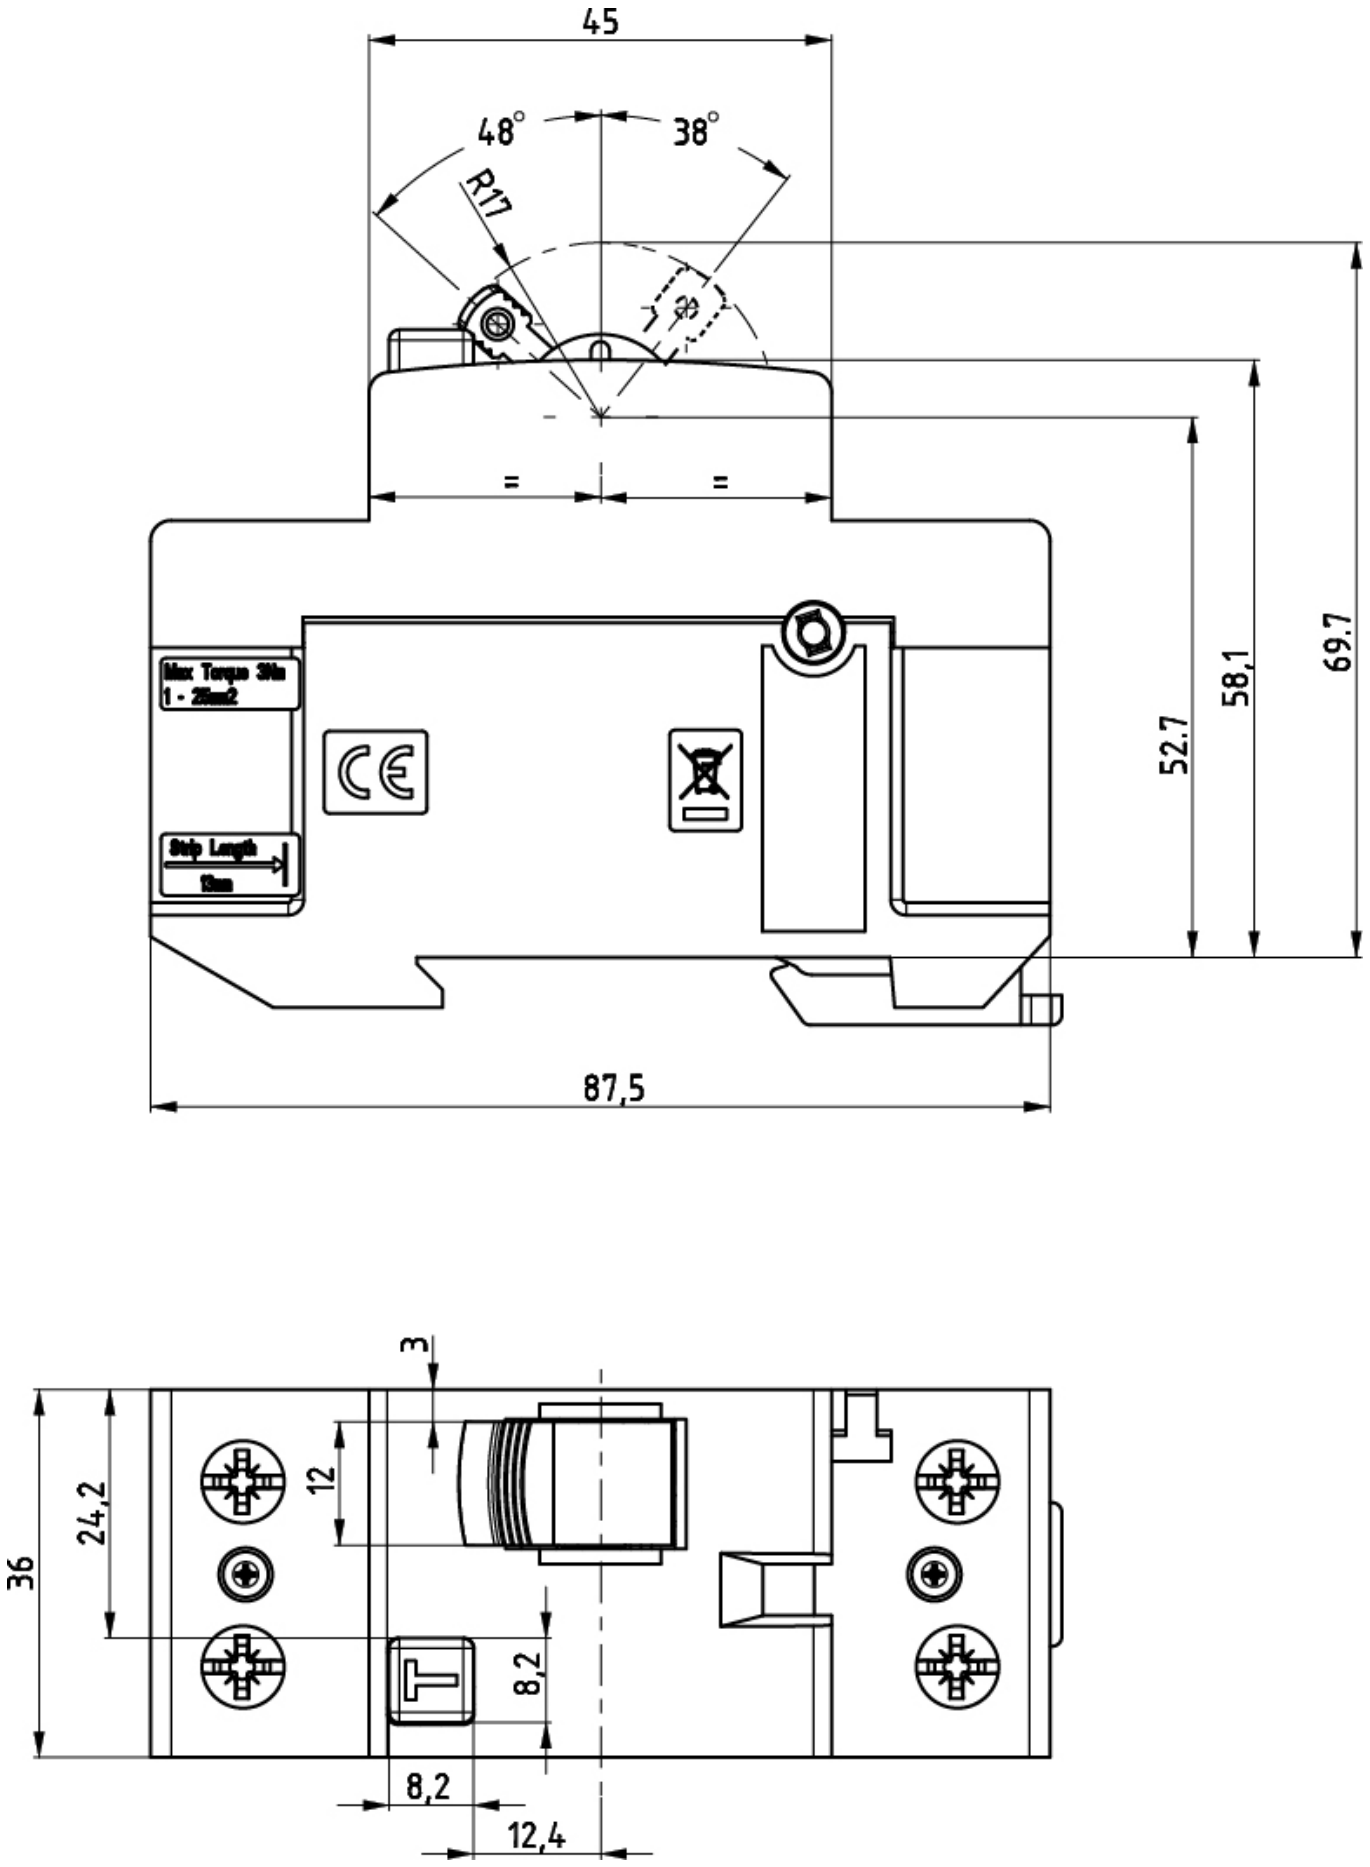
45
48°
38°
R17
Max Torque 3Nm
1 - 2.5mm2
Strip Length
10mm
52.7
58,1
69.7
87,5
3
12
24,2
36
8,2
8,2
12,4

Schema de conexiuni

