EFI-P4 A 25/0.03



Specificatii

Cod ETI	002061511
Descriere	EFI-P4 A 25/0.03
Denumire clasă	Diferen ial RCCB
Curent nominal (A)	25
Tip	A
Curent de defect nominal (A)	0.03
Tip curent	A
Tensiunea nominală(V)	415
Tip montaj	TH 35
Adâncime (mm)	68
Număr de poli	3+N
Grad de protec ie IP	IP20
Frecven ă nominală (Hz)	50/60
Standarde	IEC/EN 61008
Sec iune transversală nominală	1-25
Curent nominal de scurtcircuit Inc (kA)	10

Pagina de produse online

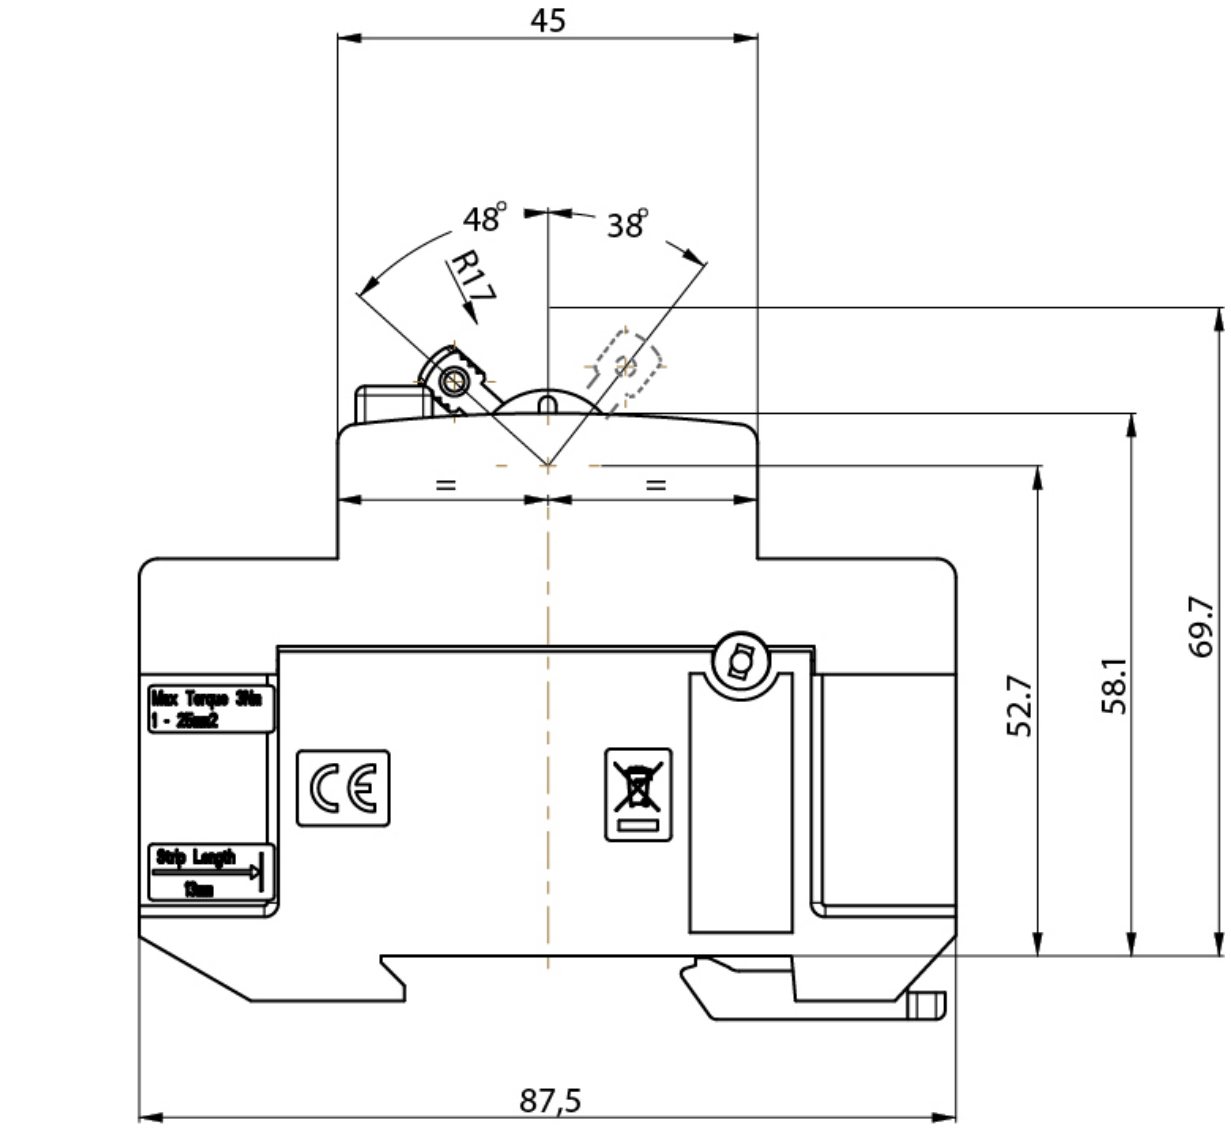
Alta documentatie

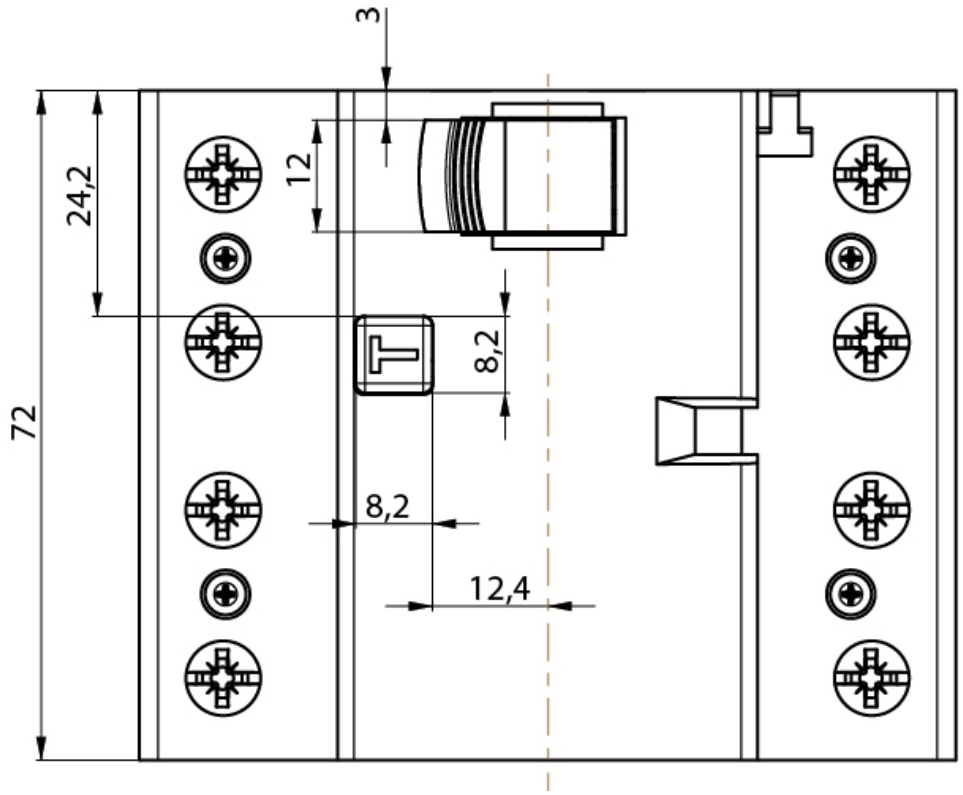
Catalog caracteristici tehnice
Certificate
Model 3D
Manual de instructiuni
Declaratie CE
COM_ETISTORE_ITEM_DOCTYPE_whitePaper
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	25A
Rated fault current	30mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	
Short-time delayed tripping	
Short-circuit breaking capacity (Icw)	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	1
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Connectable conductor cross section multi-wired	1…25mm²

Desen cotat


45
48°
38°
R17
13
52.7
58.1
69.7
87,5


3
12
24,2
72
8,2
8,2
12,4

Schema de conexiuni

