# ETIMAT P6 3p C10



## Specificatii

| | |
|---|---|
| Cod ETI | 001900328 |
| Descriere | ETIMAT P6 3p C10 |
| Denumire clasă | Disjunctor miniatural |
| Curent nominal (A) | 10A |
| Caracteristică de întrerupere | C |
| Număr de poli | 3 |
| Capacitatea de rupere (kA) | 6kA |
| Tipul voltajului | AC |
| Tensiunea nominala de rezistenta Uimp (kV) | 6kV |
| Tensiune nominală AC (V) | 415V |
| Frecven ă nominală (Hz) | 50Hz/60Hz |
| Sec iune transversală nominală | 1mm²-25mm² |
| Standarde | 60898-1,60947-2 |
| Func ie | MCB |

Pagina de produse online


## Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi


## ETIM clasificare internationala

| | |
|---|---|
| Clasificare | EC000042 |
| Denumire clasă | Miniature circuit breaker (MCB) |
| Release characteristic | C |
| Number of poles (total) | 3 |
| Number of protected poles | 3 |
| Rated current | 10A |
| Rated voltage | 415V |
| Rated insulation voltage Ui | 500V |
| Rated impulse withstand voltage Uimp | 6kV |
| Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V | 6kA |
| Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V | 6kA |
| Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V | 6kA |
| Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V | 6kA |
| Voltage type | AC |
| Frequency | 50…60Hz |
| Current limiting class | 3 |
| Suitable for flush-mounted installation | Da |
| Concurrently switching neutral conductor | Da |
| Over voltage category | 3 |
| Pollution degree | 2 |
| Additional equipment possible | Da |
| Width in number of modular spacings | 3 |
| Built-in depth | 70mm |
| Degree of protection (IP) | IP20 |
| Ambient temperature during operating | -40…70°C |
| Connectable conductor cross section multi-wired | 1…25mm² |
| Connectable conductor cross section solid-core | 1…25mm² |

# Caracteristicile energiei de topire

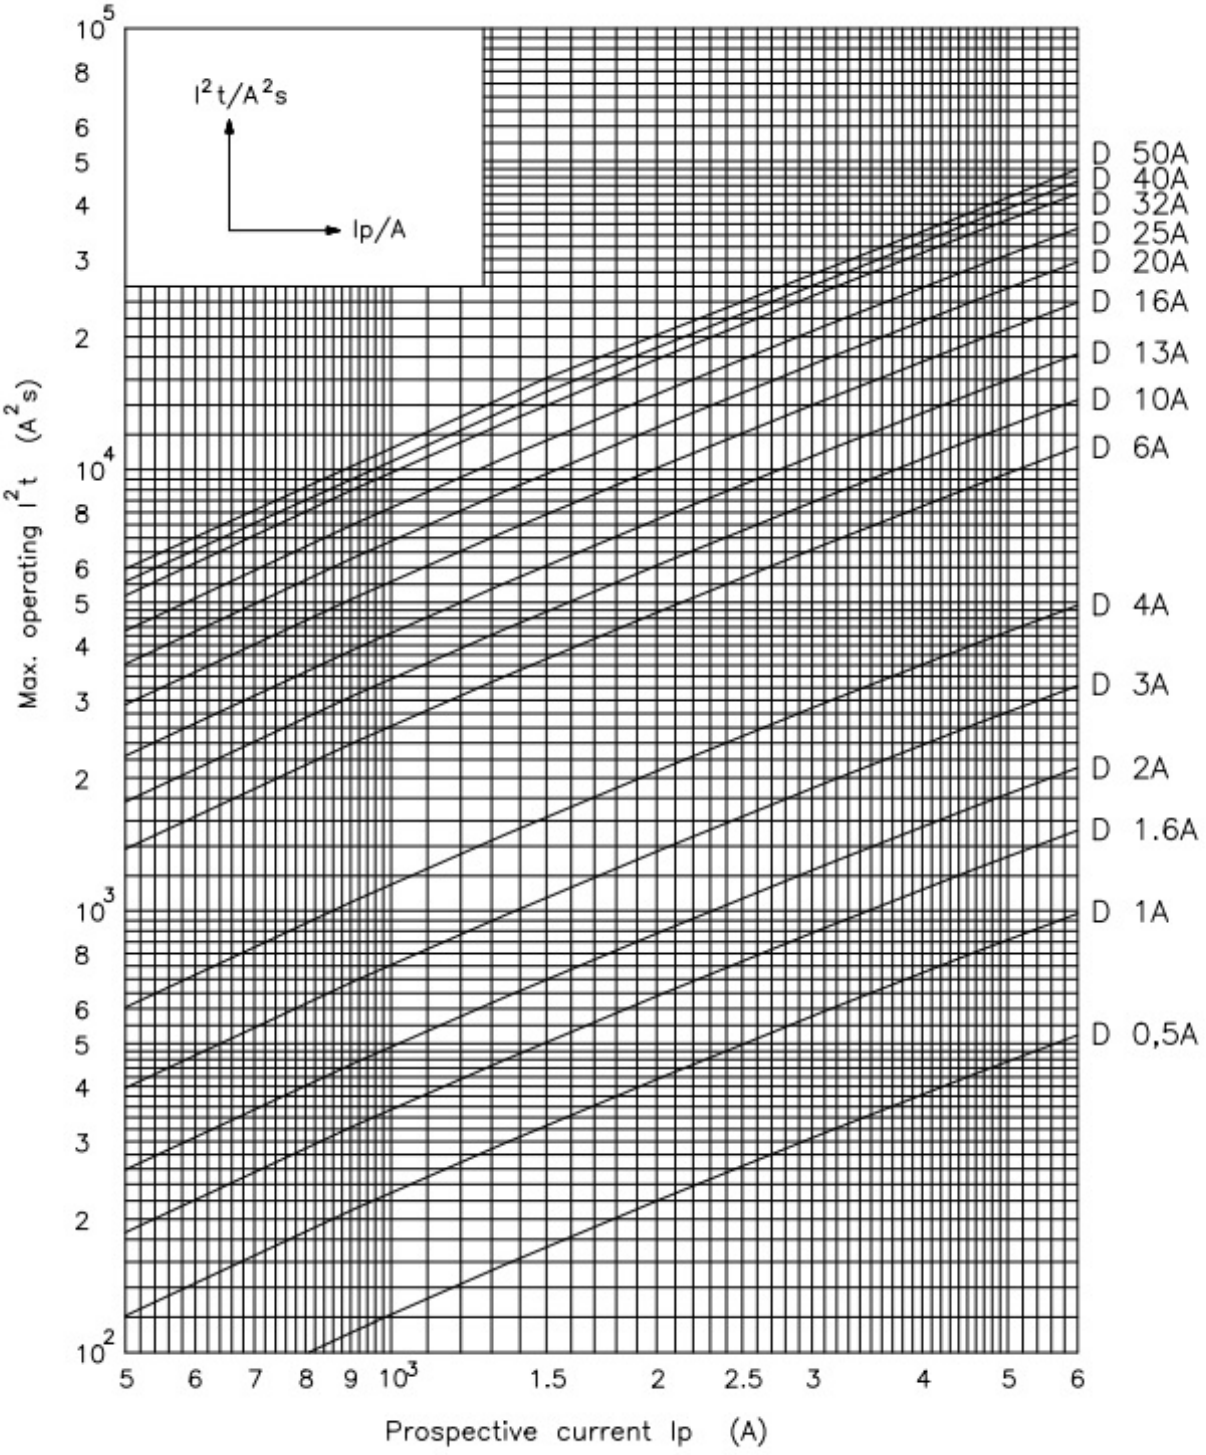

# Desen cotat

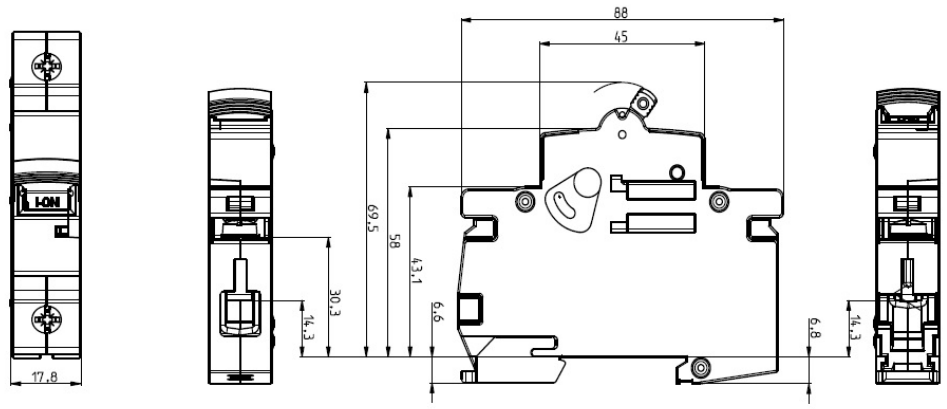

# Simbol/Conexiune

