ETIMAT P6 3p+N B32



Specificatii

Cod ETI	001900413
Descriere	ETIMAT P6 3p+N B32
Denumire clasă	Disjunctor miniatural
Curent nominal (A)	32A
Caracteristică de întrerupere	B
Număr de poli	3+N
Capacitatea de rupere (kA)	6kA
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6kV
Tensiune nominală AC (V)	415V
Frecven ă nominală (Hz)	50Hz/60Hz
Sec iune transversală nominală	1mm²-25mm²
Standarde	60898-1,60947-2
Func ie	MCB

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi


ETIM clasificare internationala

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	4
Number of protected poles	3
Rated current	32A
Rated voltage	415V
Rated insulation voltage Ui	500V
Rated impulse withstand voltage Uimp	6kV
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50…60Hz
Current limiting class	3
Suitable for flush-mounted installation	Da
Concurrently switching neutral conductor	Da
Over voltage category	3
Pollution degree	2
Additional equipment possible	Da
Width in number of modular spacings	4
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40…70°C
Connectable conductor cross section multi-wired	1…25mm²
Connectable conductor cross section solid-core	1…25mm²

Caracteristicile energiei de topire

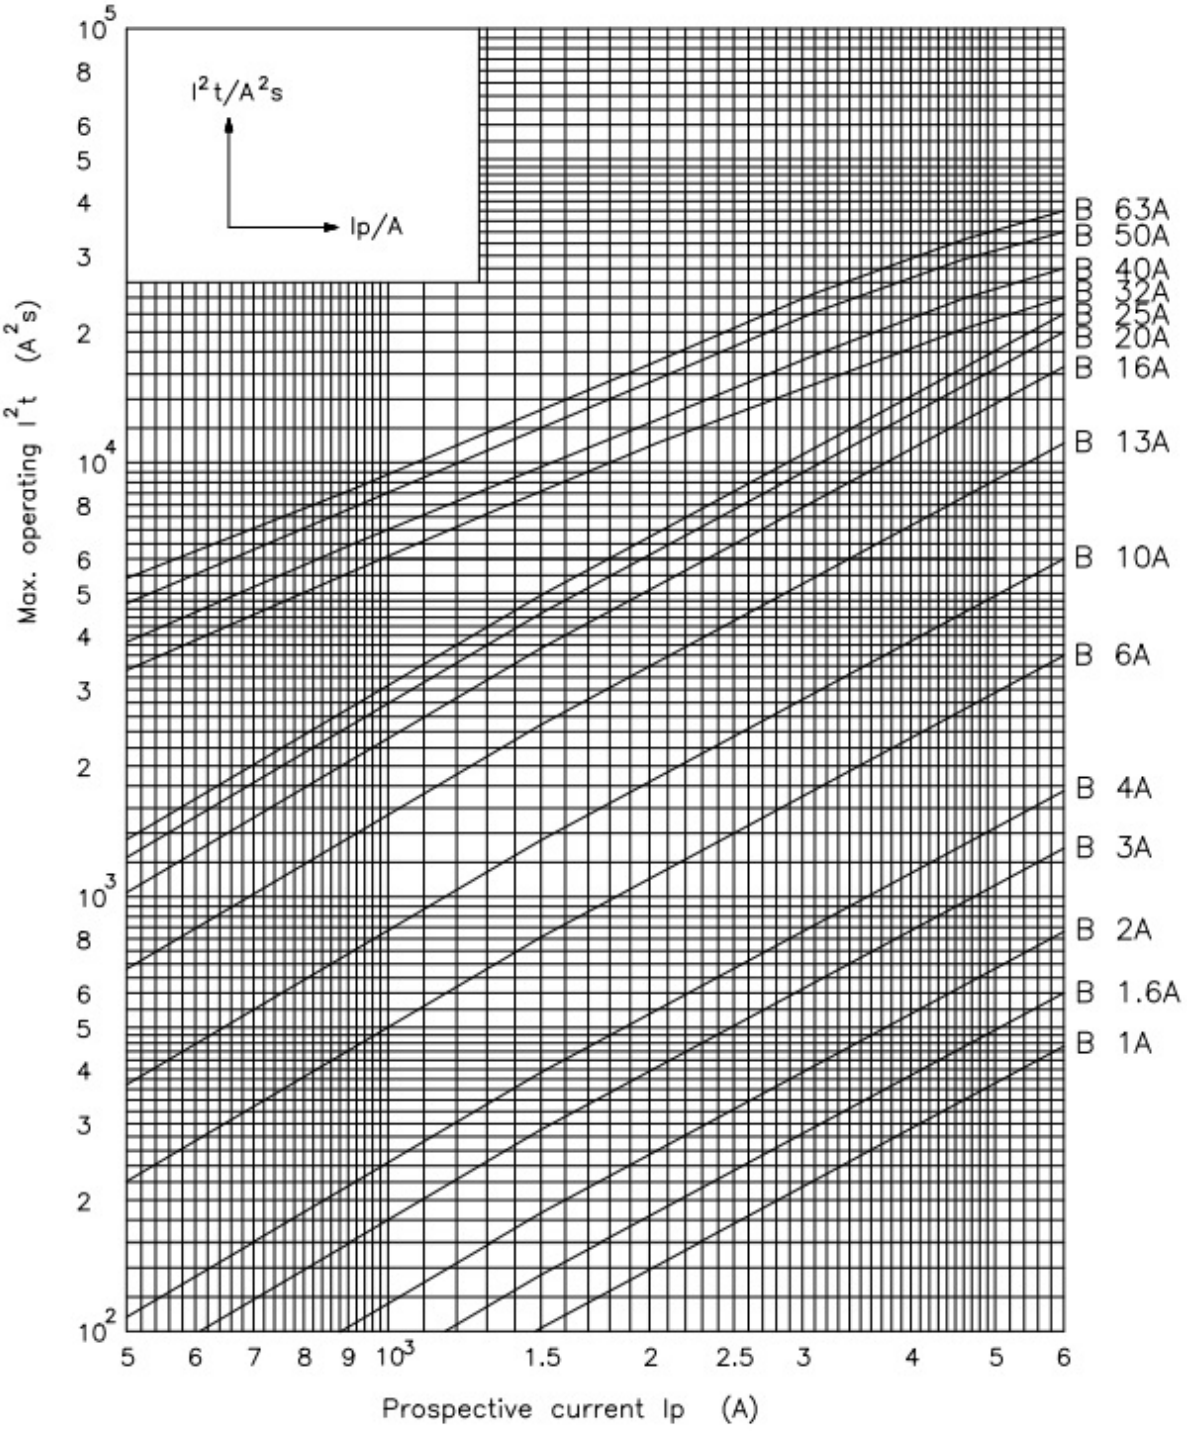

Desen cotat

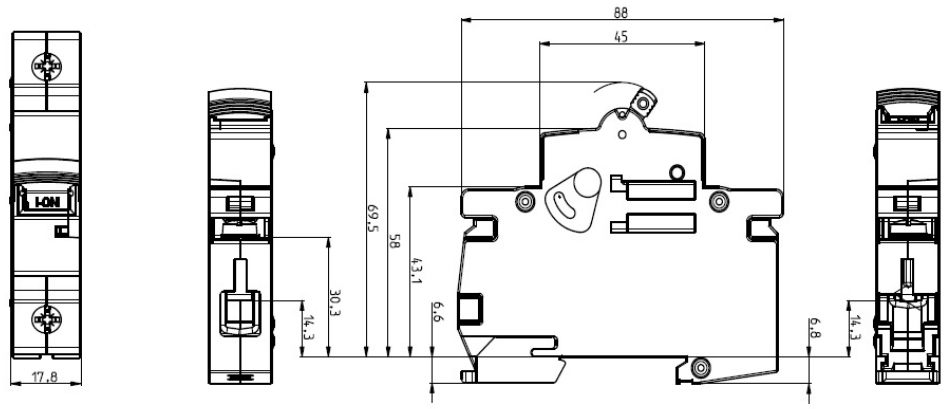

Simbol/Conexiune

