KZS-AFDD 3M2p A B32/0.03



Specificatii

Cod ETI	002173817
Descriere	KZS-AFDD 3M2p A B32/0.03
Denumire clasă	Dispozitiv detectare arc (AFDD)
Curent nominal (A)	32A
Tip	A
Curent de defect nominal (A)	0.03A
Caracteristică de întrerupere	B
Număr de poli	2
Capacitatea de rupere (kA)	10kA
Sec iune transversală nominală	1mm²-25mm²
Standarde	IEC/EN 61009-1,IEC/EN 62606

Pagina de produse online

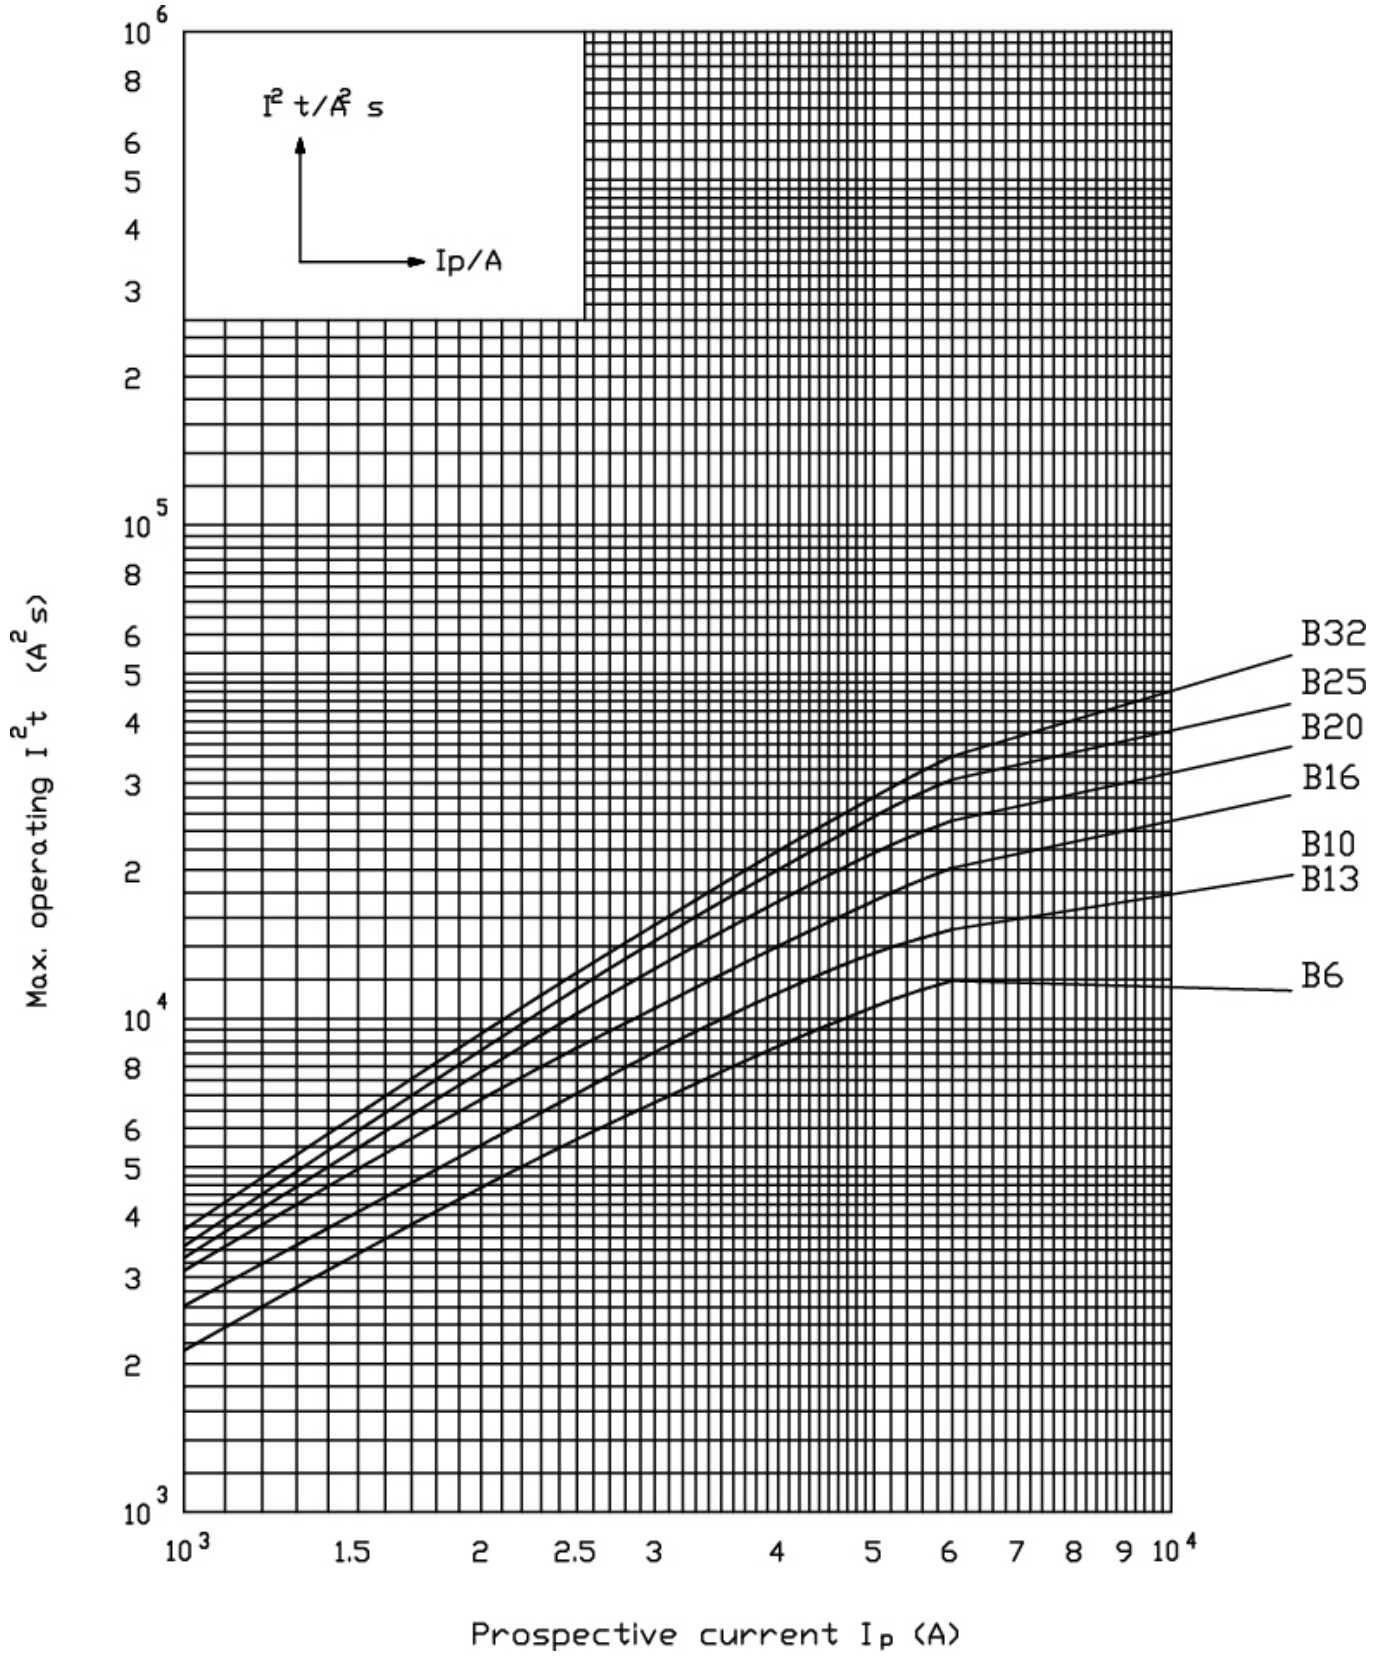
Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi

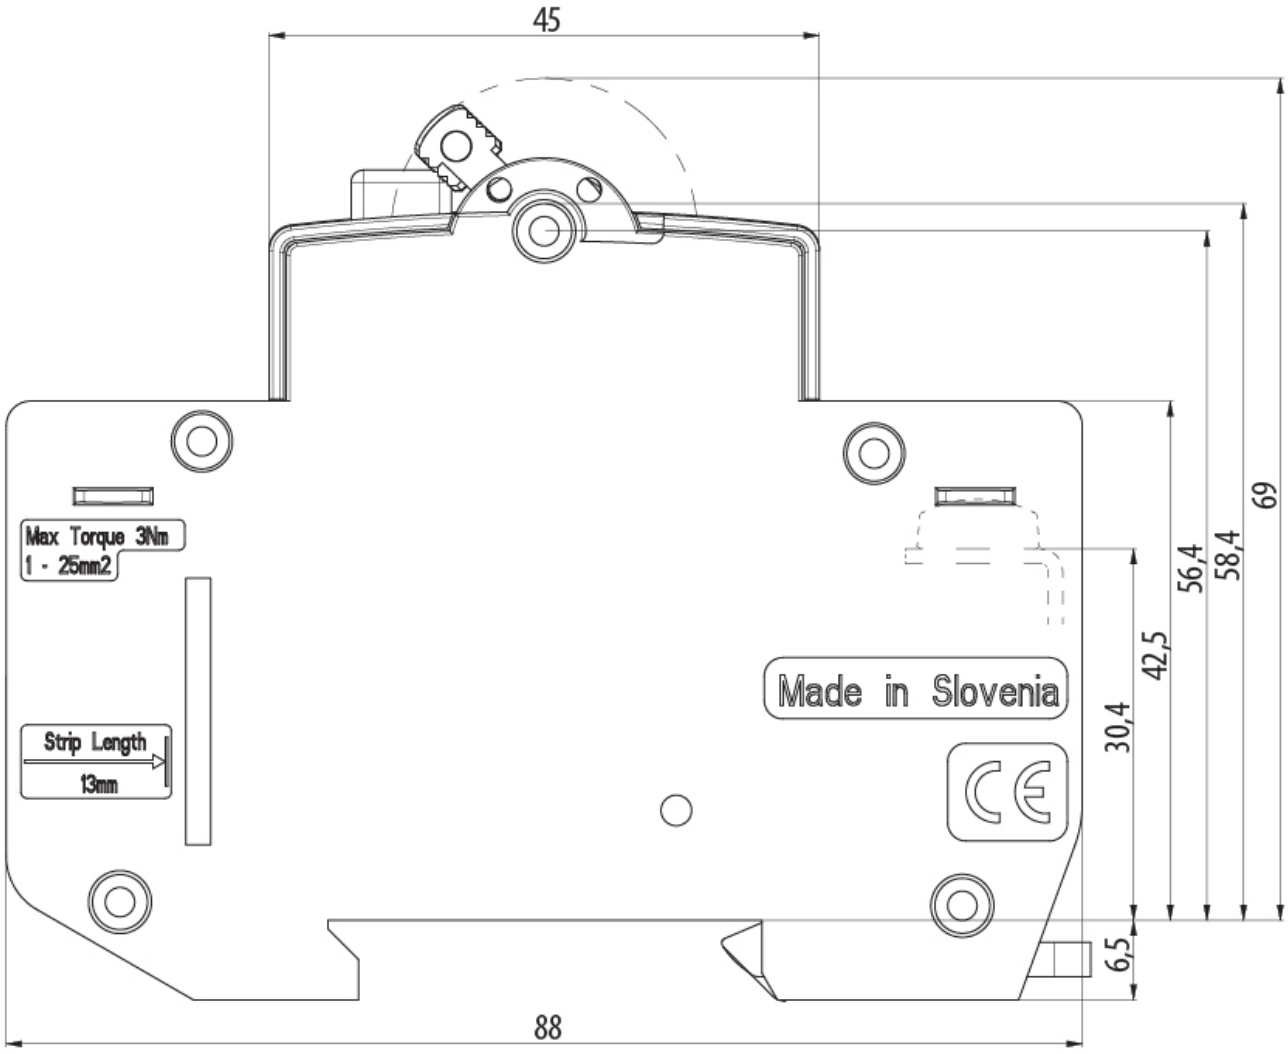
ETIM clasificare internationala

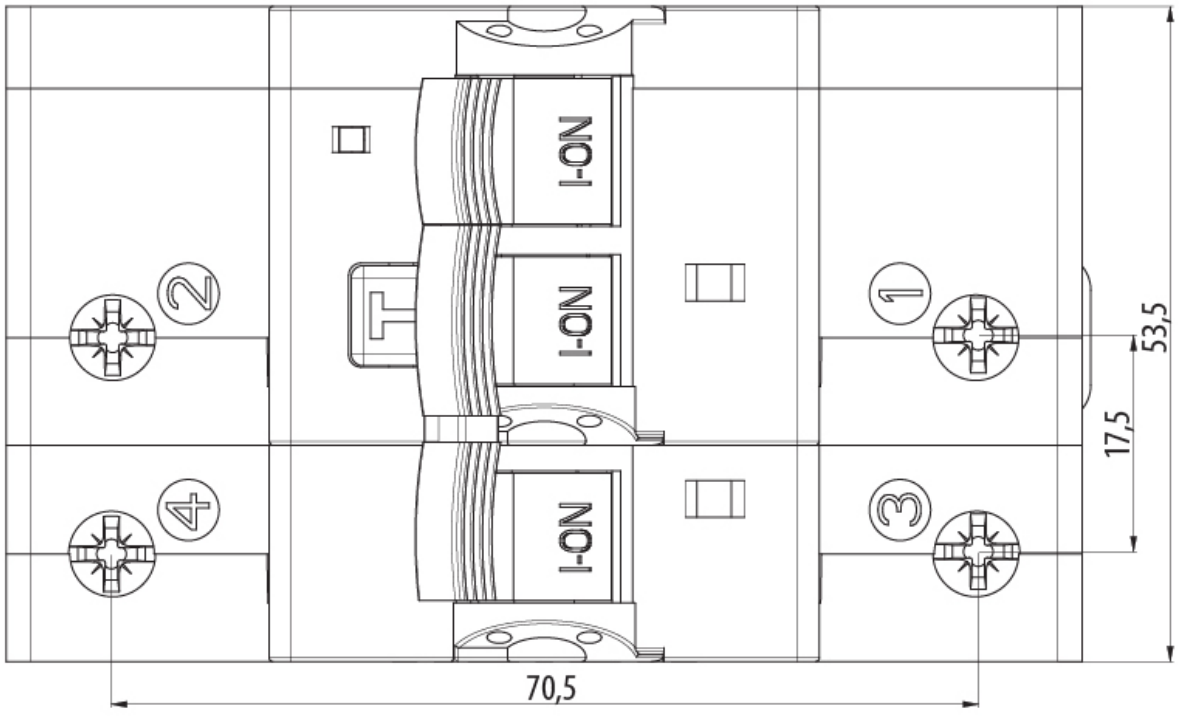
Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated impulse withstand voltage Uimp	4kV
Rated current	32A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Frequency	50 Hz
Release characteristic	B
Ambient temperature during operating	-25...40°C
Width in number of modular spacings	3
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm²
Connectable conductor cross section multi-wired	1...25mm²

Caracteristicile energiei de topire



Desen cotat


45
Max Torque 3Nm
1 - 25mm2
Strip Length
13mm
Made in Slovenia
69
58,4
56,4
42,5
30,4
6,5
88


I-ON
I-ON
I-ON
1
2
3
4
53,5
17,5
70,5

Simbol/Conexiune

