ETITEC EM T2 PV 1100/20 Y



Specificatii

Cod ETI	002440623
Descriere	ETITEC EM T2 PV 1100/20 Y
Denumire clasă	Protec ie supratensiuni
Func ie	SPD
Tip	T2
Tip curent	DC
Mărime	3 modules
Număr de poli	2
Utilizare (IEC/VDE)	II / C
Imax(8/20) [kA]	40
Semnalare la distan ă	NU
Grad de protec ie IP	IP20
Montare	Șină tip DIN 35 mm
Grup Catalog	ETITEC EM PV
Instalare	Protec ie PV
In (8/20)	20
Numarul de module	3
Parte superioara - Nivel de protectie a tensiunii (kV)	3,9
Curent de scurgere	DA
Tehnologie aplicata	MOV
Adancime incorporata (mm)	60

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000941
Denumire clasă	Surge protection device for power supply systems
System configuration DC	1
System configuration IT	
System configuration TN	
System configuration TN-C	
System configuration TN-C-S	
System configuration TN-S	
System configuration TT	
System configuration other	
Number of conductors (without earthing)	2
Nominal discharge surge current (8/20)	20
Short-circuit breaking capacity (Isccr)	9
Max. discharge surge current (8/20)	40
Max. continuous voltage DC	1100
Mounting method	DIN rail (top hat rail) 35 mm
Construction size	3 modular spacing
Max. PV-voltage	916
Voltage protection level	3,9
Max. conductor cross section solid (solid, stranded)	35
Max. conductor cross section flexible (fine-strand)	25
With remote signalling contact	
Integrated backup fuse	
Signalling at the device	Optical
Category type 2	1
Degree of protection (IP)	IP20

Desen cotat

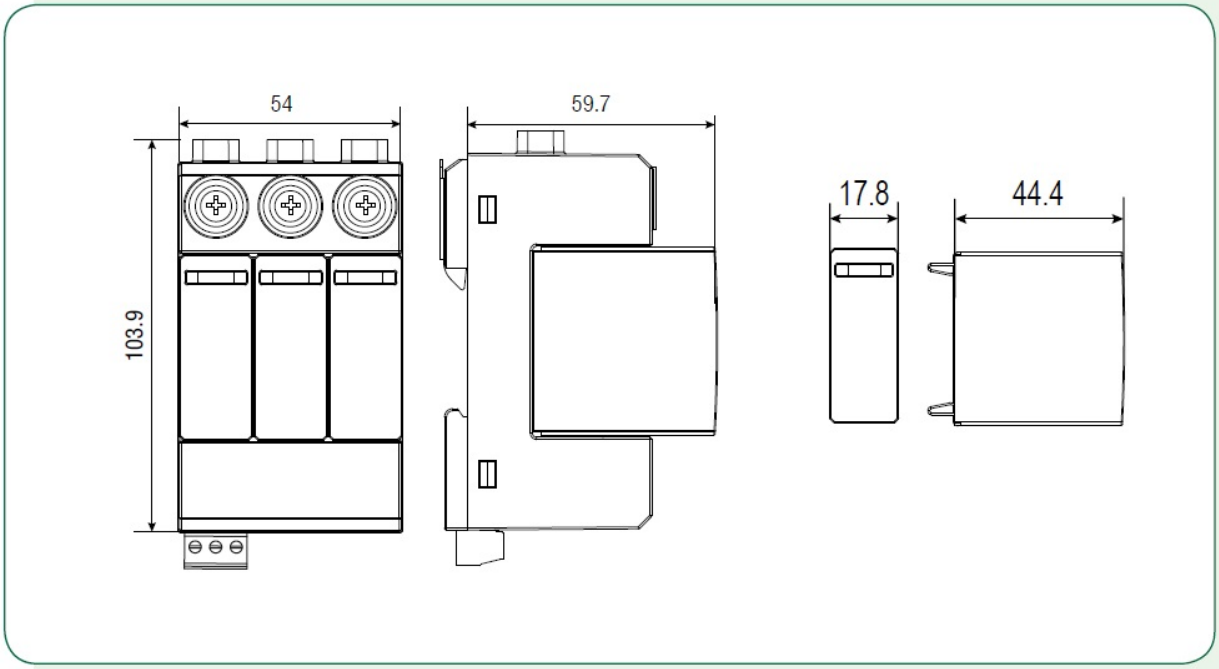

Simbol/Conexiune

