ETIMAT P6 3p+N C25



Specificatii

Cod ETI	001900432
Descriere	ETIMAT P6 3p+N C25
Denumire clasă	Întrerupător de circuit
Func ie	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	C
Curent nominal (A)	25
Tensiunea nominală(V)	415
Număr de poli	3+N
Frecven ă nominală (Hz)	50/60
Standarde	60898-1, 60947-2
Sec iune transversală nominală	1...25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
Eplan mușchi


ETIM clasificare internationala

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	4
Number of protected poles	3
Rated current	25A
Rated voltage	415V
Rated insulation voltage Ui	500V
Rated impulse withstand voltage Uimp	6kV
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Type of drive	50…60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	4
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40…70°C
Connectable conductor cross section multi-wired	1…25mm²
Connectable conductor cross section solid-core	1…25mm²


Caracteristicile energiei de topire

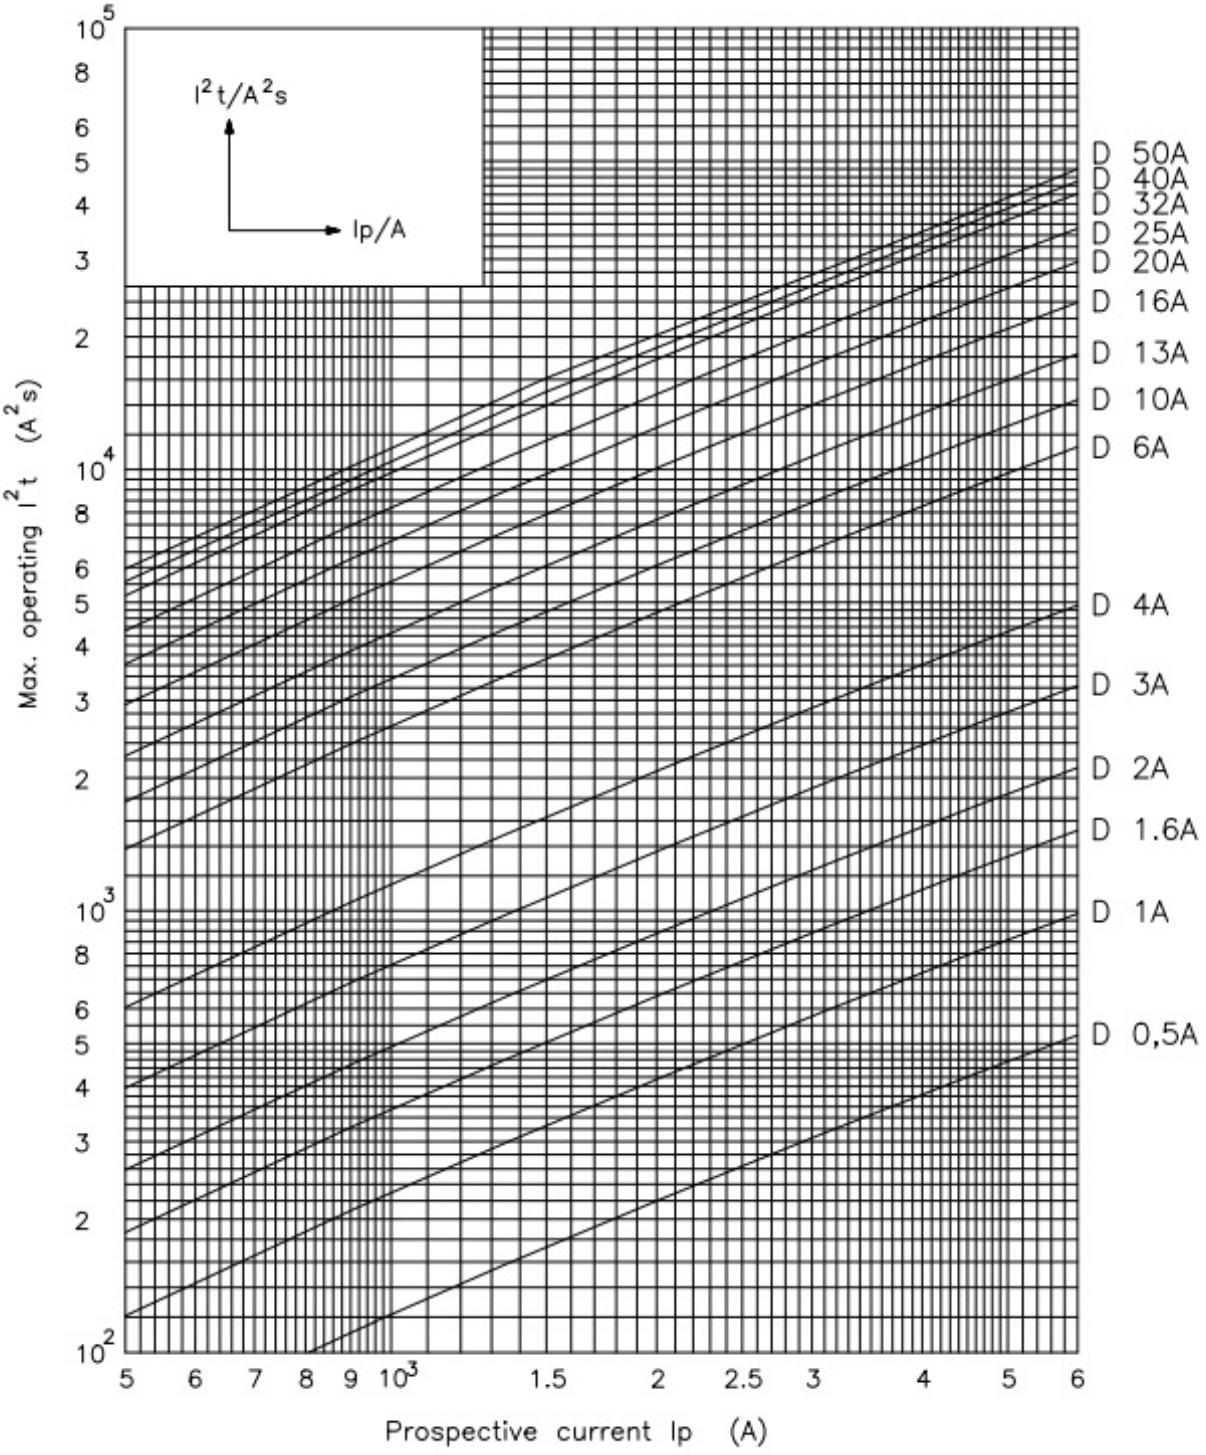

Caracteristici

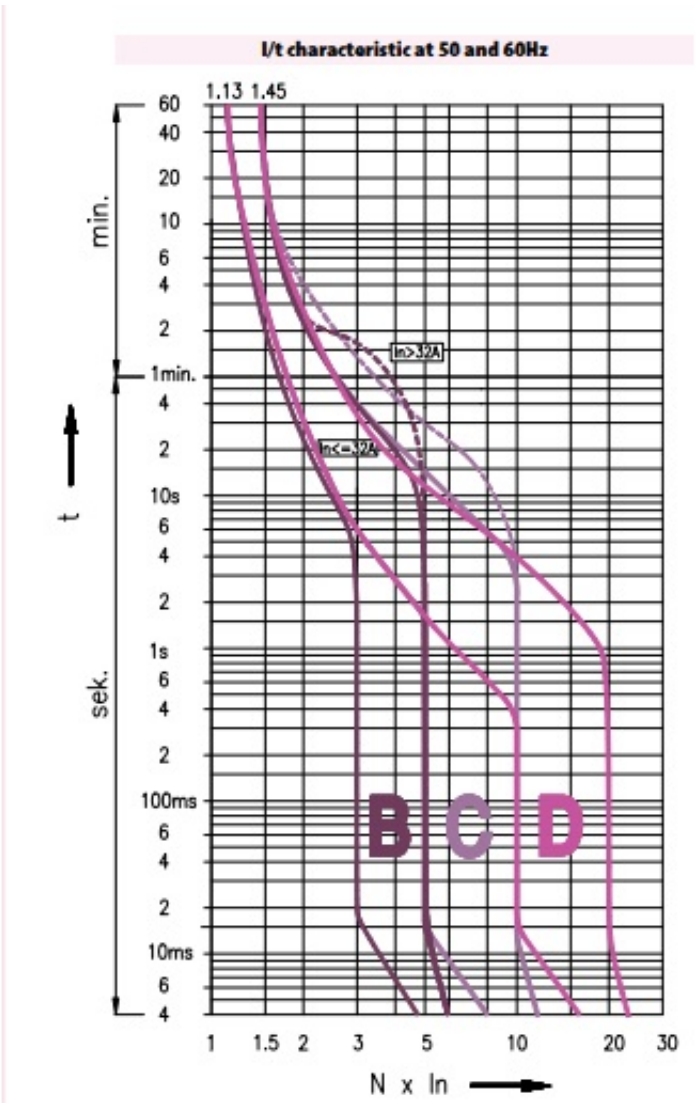

Desen cotat

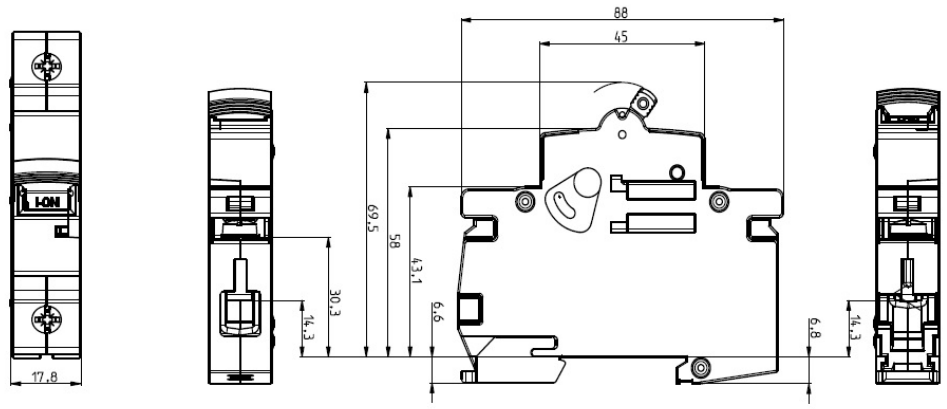

Simbol/Conexiune

