ECT 4x18PT



Specificatii

Cod ETI	001100270
Descriere	ECT 4x18PT
Denumire clasă	Cutie distribu ie
Tip montaj	Suprafa ă montată
Curent nominal (A)	63A
Grad de protec ie IP	IP40
Dimensiune (numarul de randuri)	4
Numarul de module (total / pe rand)	72/18
Usa (material, culoare)	Plastic, transparent
Parte inferioara cutie (material, culoare)	Plastic, alb
Numarul de terminale PE/N (conexiuni)	30
Test pentru fire (°C)	650°C
Tensiune nominală DC (V)	400V
Tensiune nominală AC (V)	400V

Pagina de produse online

Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi

Desen cotat

Technical data	
Degree of protection	IP 40*
Colour	white
Double insulation	⧈
Standard	IEC 62208, IEC 60670-1, IEC 60670-24
Installation temperature	-25° / +60°C
Glow wire test	650°C

*IP 30 for EC 1+1, 3+1, 3+2, ECGxxMEDIA

Number of N - PE terminals:


ECT/ECM4PT/PO	2x4	4 PE / 4 N
ECT/M8PT/PO	2x8	8 PE / 8 N
ECT/M12PT/PO	2x10	10 PE / 10 N
ECT/M18PT/PO	2x13	13 PE / 13 N
ECT/M24PT/PO	2x13	13 PE / 13 N
ECT/M36PT/PO	2x15	15 PE / 15 N
ECT48PT/PO	2x20	20 PE / 20 N
ECT/M 2x18PT/PO	2x15	15 PE / 15 N
ECT/M 3x18PT/PO	2x25	25 PE / 25 N
ECT 4x18PT/PO	2x30	30 PE / 30 N
ECG14	2x10	10 PE / 10 N
ECG28	2x13	13 PE / 13 N
ECG42	2x15	15 PE / 15 N
ECG56	2x20	20 PE / 20 N
ECG70	2x30	30 PE / 30 N
EC 1+1	-	
EC 3+1	-	
EC 3+2	2x4	4 PE / 4 N

- ECG14, ECG28, ECG42 have 1 additional free space to build in an extra PST-UNI terminal.
- ECG56 has 3 additional free spaces to build in up to 3 extra PST-UNI terminals.
- Double insulation not valid for ECG MEDIA

Surface mounted distribution board

type	Dimensions A	B	C	D	E	Max. allowed power losses when Max. number of devices are installed Pde
ECT4PT/ECT4PO	235 mm	143 mm	98 mm	127 mm	46 mm	10W
ECT8PT/ECT8PO	236 mm	287 mm	112 mm	107 mm	180 mm	16W
ECT12PT/ECT12PO	236 mm	287 mm	112 mm	107 mm	180 mm	30W
ECT18PT/ECT18PT	361 mm	287 mm	112 mm	232 mm	180 mm	30W
ECT24PT/ECT24PO	485 mm	287 mm	112 mm	357 mm	180 mm	30W
ECT36PT/ECT36PO	652 mm	287 mm	112 mm	482 mm	180 mm	35W
ECT48PT/ECT48PO	236 mm	396 mm	112 mm	107 mm	289 mm	25W
ECT2x18PT/ECT2x18PO	361 mm	396 mm	112 mm	232 mm	289 mm	30W
ECT3x18PT/ECT3x18PO	526 mm	396 mm	112 mm	357 mm	289 mm	35W
ECT3x18PT/ECT3x18PO	651 mm	396 mm	112 mm	482 mm	289 mm	40W

*Sizes are also valid for IT distribution boards DIDO-E MEDIA: ECT…MEDIA

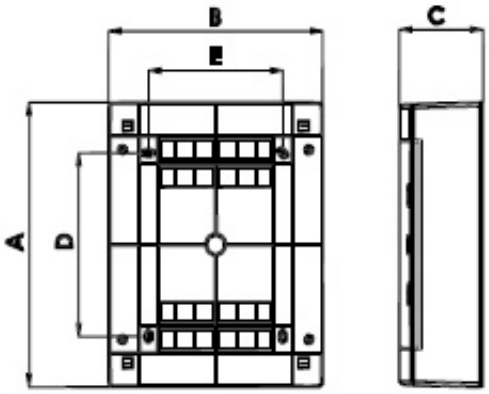

Flush mounted distribution board

type	Dimensions A	B	C	D	E	F	G	Max. allowed power losses when Max. number of devices are installed Pde
ECM4PT/ECM4PO	232 mm	139 mm	99 mm	-	123 mm	216 mm	69 mm	10W
ECM8PT/ECM8PO	232 mm	211 mm	99 mm	-	201 mm	212 mm	68 mm	16W
ECM12PT/ECM12PO	232 mm	283 mm	106 mm	-	273 mm	212 mm	68 mm	25W
ECM18PT/ECM18PO	357 mm	283 mm	106 mm	125 mm	273 mm	336 mm	68 mm	30W
ECM24PT/ECM24PO	482 mm	283 mm	106 mm	125 mm	273 mm	462 mm	68 mm	30W
ECM36PT/ECM36PO	232 mm	392 mm	106 mm	-	382 mm	212 mm	68 mm	25W
ECM2x18PT/ECM2x18PO	357 mm	392 mm	106 mm	125 mm	382 mm	336 mm	68 mm	30W
ECM3x18PT/ECM3x18PO	522 mm	392 mm	106 mm	125 mm	382 mm	502 mm	68 mm	35W

