

## EFI-P4 A 40/0.03



### Specificatii

Cod ETI	002061512
Descriere	EFI-P4 A 40/0.03
Denumire clasă	Înterupător diferențial
Curent de defect nominal (A)	0.03A
Tip	A
Curent nominal (A)	40A
Adâncime (mm)	68mm
Tip montaj	TH 35
Număr de poli	3+N
Curent nominal de scurtcircuit Inc (kA)	10kA
Tensiune nominală AC (V)	400V/415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm <sup>2</sup> -25mm <sup>2</sup>
Standarde	IEC/EN 61008
Grad de protecție IP	IP20

Pagina de produse online [🔗](#)

### Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

2D mușchi

Manual de instructiuni

Declaratie CE


White paper

Eplan mușchi

## ETIM clasificare internațională

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	40A
Rated fault current	30mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	Nu
Short-time delayed tripping	Nu
Short-circuit breaking capacity (I <sub>cw</sub> )	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	Da
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>

## Desen cotat

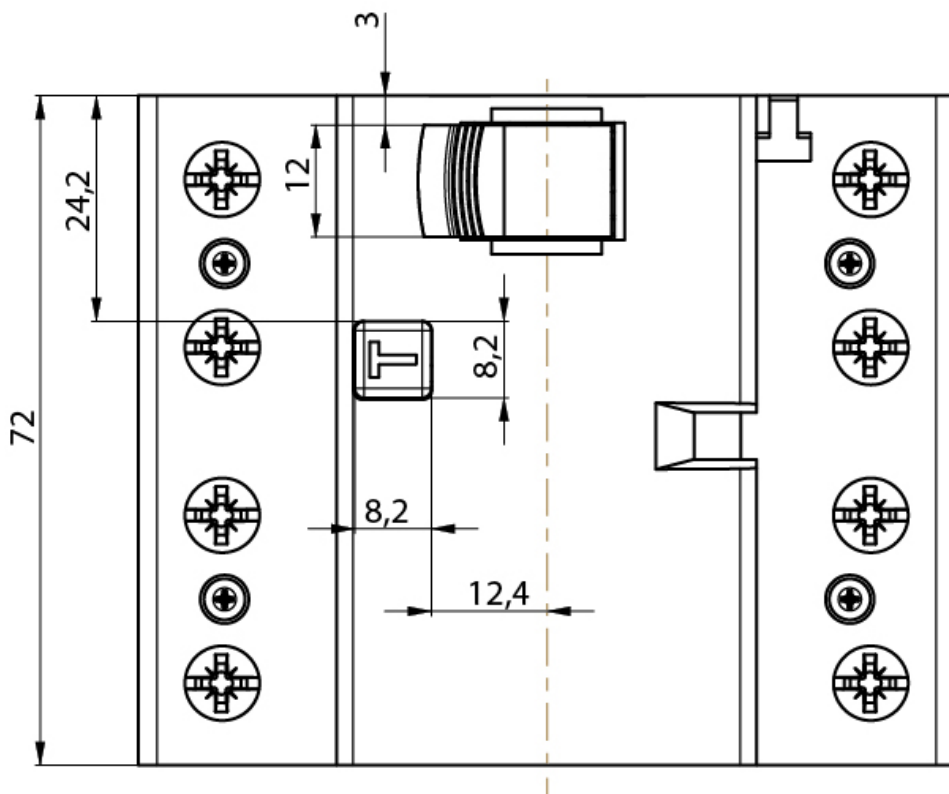



## Schema de conexiuni

