

# ETIMAT P6 2p C6



## Specificatii

Cod ETI	001900227
Descriere	ETIMAT P6 2p C6
Denumire clasă	Disjunctor miniatural
Curent nominal (A)	6A
Caracteristică de întrerupere	C
Număr de poli	2
Capacitatea de rupere (kA)	6kA
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6kV
Tensiune nominală AC (V)	415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm <sup>2</sup> -25mm <sup>2</sup>
Standarde	60898-1,60947-2
Funcție	MCB

[Pagina de produse online](#) 

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[2D mușchi](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)


## ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	2
Number of protected poles	2
Rated current	6A
Rated voltage	415V
Rated insulation voltage $U_i$	500V
Rated impulse withstand voltage $U_{imp}$	6kV
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	Da
Concurrently switching neutral conductor	Da
Over voltage category	3
Pollution degree	2
Additional equipment possible	Da
Width in number of modular spacings	2
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>

## Caracteristicile energiei de topire

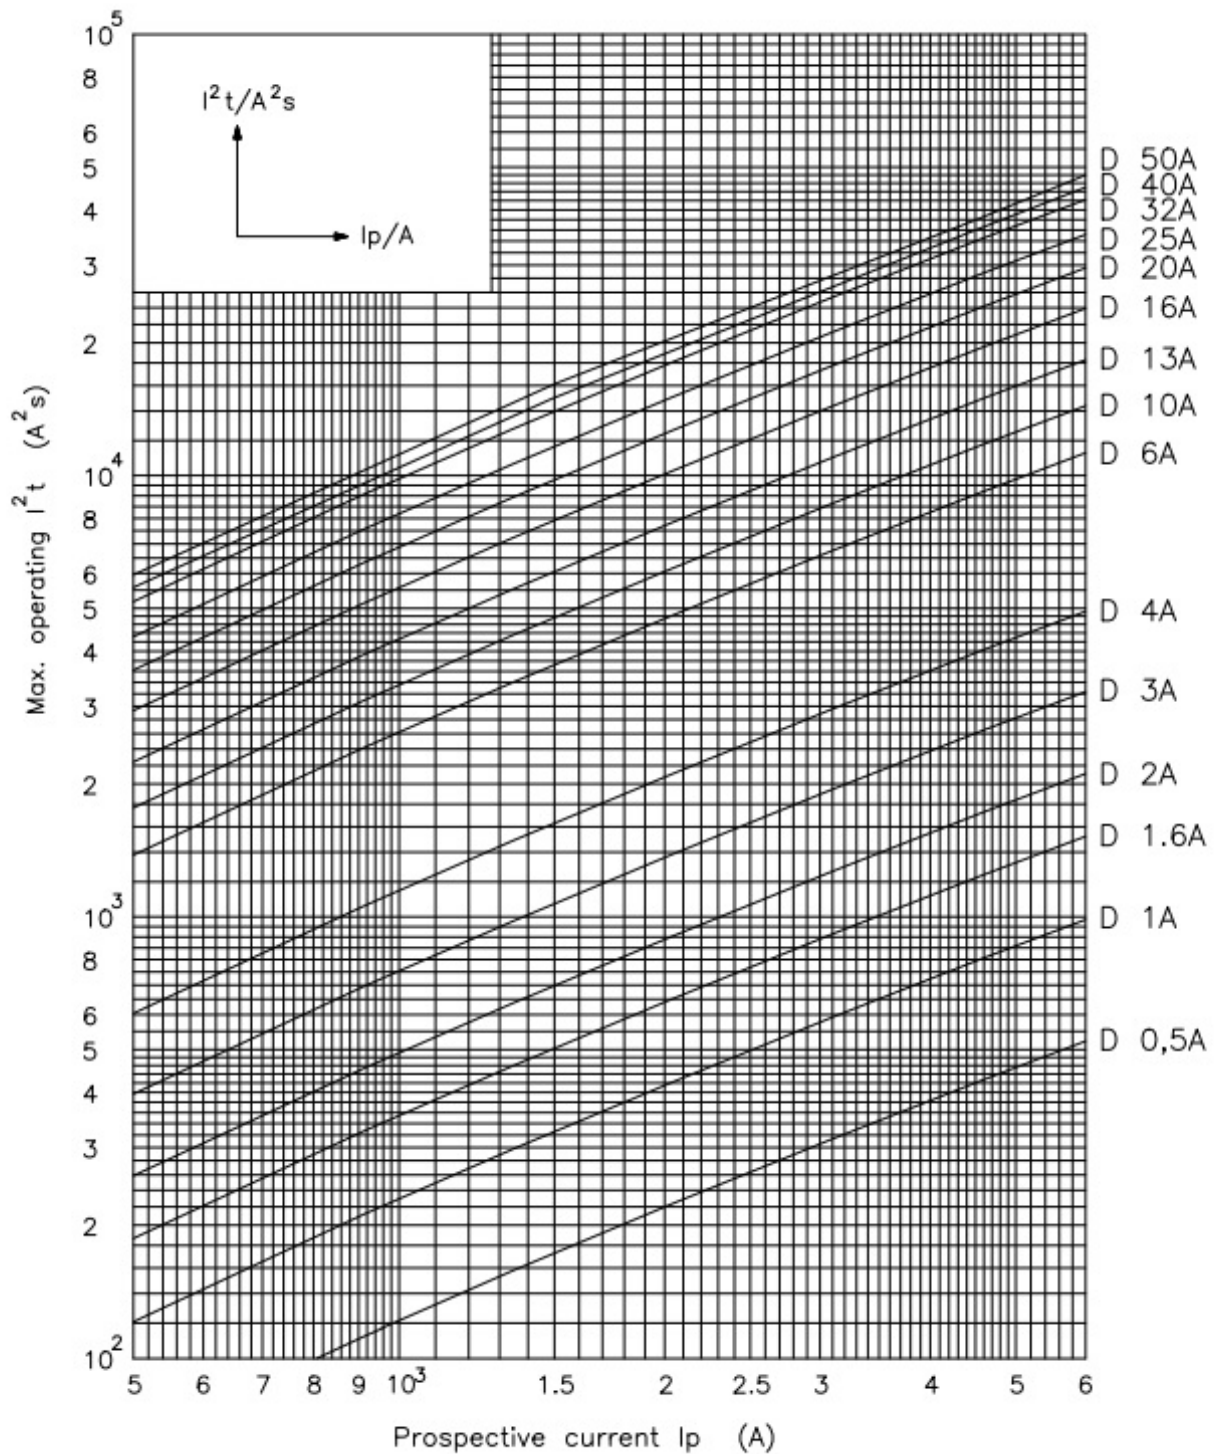

## Desen cotat

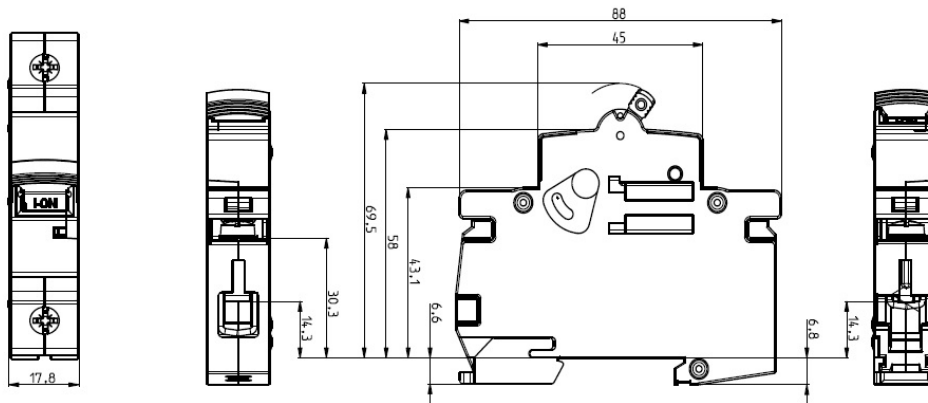

## Simbol/Conexiune

1p




1p+n



2p



3p



3p+n

