

HRN-31



Specificatii

Cod ETI	002471450
Descriere	HRN-31
Denumire clasă	Releu control
Func ie	Relee monitorizare și control
Tensiunea de alimentare (V)	48V-276V
Tipul de control	Umax,Umin
Numarul de contacte	1
Tipul voltajului	AC/DC
Curent nominal (A)	16A
Capacitatea maxima de incarcare AC1 (VA)	4000VA
Tipuri de contacte	1xCO
Număr de contacte NC	0
Număr contacte CO	1
Număr contacte NO	0
DC tensiunea nominală a bobinei Uc (V)	48V-276V

Pagina de produse online [🔗](#)

Alta documentatie



Catalog caracteristici tehnice

Model 3D

2D mușchi

Manual de instructiuni




Declaratie CE

Eplan mușchi


ETIM clasificare internationala

Clasificare	EC001438
Denumire clasă	Voltage monitoring relay
Type of electric connection	Screw connection
Single-phase under voltage possible	Da
Single-phase over voltage possible	Da
Single-phase hysteresis possible	Da
Contains function DC-under voltage	Da
Contains function DC-over voltage	Da
Contains function DC-voltage hysteresis	Da
Voltage measuring range 1	48...276V
Type of voltage measuring range	AC/DC
Rated control supply voltage AC 50 Hz	48...276V
Voltage type for actuating	AC
Min. adjustable delay-on energization time	0,5s
Max. permitted delay-on energization time	10s
Min. adjustable off-delay time	0,5s
Max. permitted off-delay time	10s
Number of contacts as change-over contact	1
Width	18mm
Height	90mm
Depth	65mm


Simbol/Conexiune

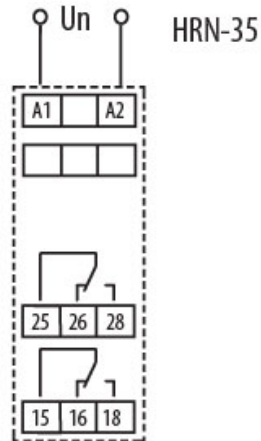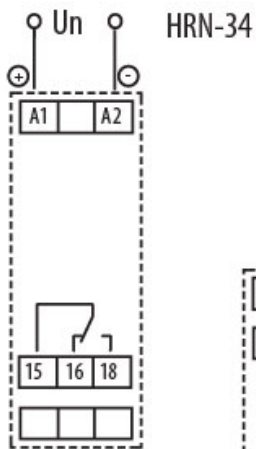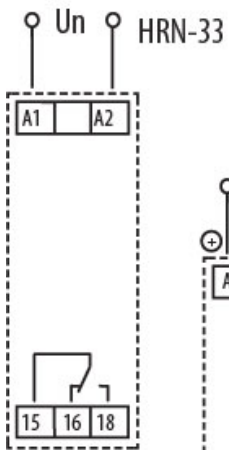

HRN-33



HRN-34



HRN-35

